


Serie 500 Series 500

Typ 505 DIN 807 WS Type 505 DIN 807 WS

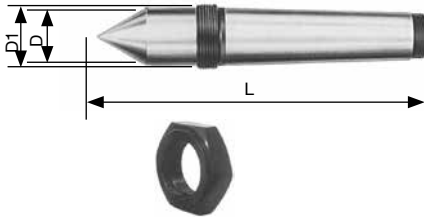

Mit Abdrückmutter
With draw-off nut

Typ / Type	MK / MT	D mm	L mm	Winkel / Angle	D1 mm	Art.-Nr. / Order no.
515	1	12,2	80	60°	M16x1,5	● 03-515
525	2	18	100	60°	M22x1,5	● 03-525
535	3	24,1	125	60°	M27x1,5	● 03-535
545	4	31,6	160	60°	M36x1,5	● 03-545
555	5	44,7	200	60°	M48x1,5	● 03-555
565	6	63,8	270	60°	M68x1,5	● 03-565


Typ 506 DIN 807 E Type 506 DIN 807 E



Hartmetalleinsatz mit Abdrückgewinde
Full carbide tip with thread

Typ / Type	MK / MT	D mm	L mm	Winkel / Angle	d mm	D1 mm	Art.-Nr. / Order no.
516	1	12,2	90	60°	7	M16x1,5	● 03-516
526	2	18	112	60°	7	M22x1,5	● 03-526
536	3	24,1	137	60°	11	M27x1,5	● 03-536
546	4	31,6	175	60°	14	M36x1,5	● 03-546
556	5	44,7	217	60°	18	M48x1,5	● 03-556
566	6	63,8	290	60°	18	M68x1,5	● 03-566


Typ 507 DIN 807 HE Type 507 DIN 807 HE

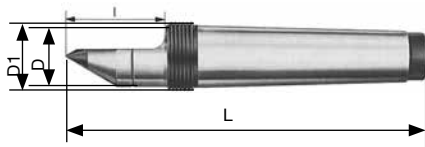

Hartmetalleinsatz, mit halber Spitze
mit Abdrückgewinde
Half carbide tip with thread

Typ / Type	MK / MT	D mm	L mm	Winkel / Angle	d mm	l mm	D1 mm	Art.-Nr. / Order no.
517	1	12,2	90	60°	7	22	M16x1,5	● 03-517
527	2	18	112	60°	7	30	M22x1,5	● 03-527
537	3	24,1	137	60°	11	38	M27x1,5	● 03-537
547	4	31,6	175	60°	14	50	M36x1,5	● 03-547
557	5	44,7	217	60°	18	63	M48x1,5	● 03-557
567	6	63,8	290	60°	18	79	M68x1,5	● 03-567

Typ 508 DIN 807 WS Type 508 DIN 807 WS

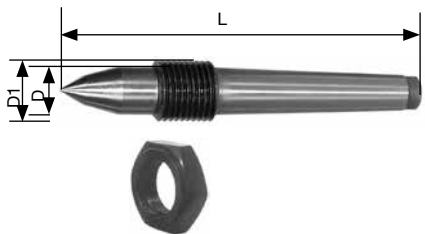

Verlängerte Spitze mit Abdrückmutter
Extended tip with draw-off nut

Typ / Type	MK / MT	D mm	L mm	Winkel / Angle	D1 mm	Art.-Nr. / Order no.
518	1	12,2	80	30°/60°	M16x1,5	● 03-518
528	2	18	118	30°/60°	M22x1,5	● 03-528
538	3	24,1	148	30°/60°	M27x1,5	● 03-538
548	4	31,6	186,5	30°/60°	M36x1,5	● 03-548
558	5	44,7	242	30°/60°	M48x1,5	● 03-558
568	6	63,8	330	30°/60°	M68x1,5	● 03-568

Passende Abdrückmuttern siehe Seite 123
Suitable draw-off nuts see page 123