


Sinus-Schraubstöcke


Sine vices

TMV-SA, mit Schnellverstellung

TMV-SA, with quick adjustment




- genaue Winkeleinstellung durch Endmaße
 - sichere Fixierung des Schraubstocks in jeder Winkeleinstellung
 - Parallelität: 0,005 mm / 100 mm
 - Rechtwinkligkeit: 0,005 mm / 100 mm
- accurate angle setting by gauge blocks
 - safe fixation in any angular position
 - parallelism: 0,005 mm / 100 mm
 - squareness: 0,005 mm / 100 mm

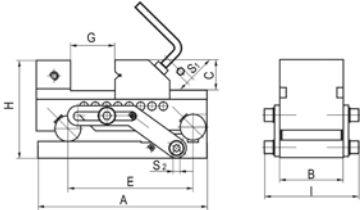


Typ / Type	A mm	B mm	C mm	E mm	G mm	H mm	I mm	S1 mm	S2 mm	kg	Art.-Nr. / Order no.
SA63	170	63	32	100±0,005	85	94	88	6	5	5	● 14-TMV-SA63
SA73	185	73	35	100±0,005	100	101	98	6	5	9	● 14-TMV-SA73
SA88	230	88	40	150±0,0075	125	108	117	8	6	11	● 14-TMV-SA88

TMV-SB, mit Gewindespindel

TMV-SB, screw type



Typ / Type	A mm	B mm	C mm	E mm	F mm	G mm	H mm	I mm	S mm	kg	Art.-Nr. / Order no.
SB63	185	63	32	100±0,005	227	85	92,5	88	5	7	● 14-TMV-SB63
SB73	205	73	35	150±0,0075	253	100	107,5	98	6	9	● 14-TMV-SB73
SB100	255	100	45	200±0,01	293	125	117,5	129	6	17	● 14-TMV-SB100

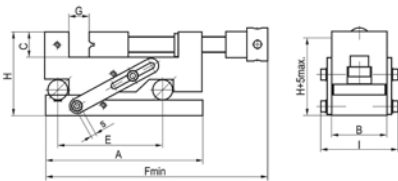

TMV-SB2, mit Gradeinteilungen

TMV-SB2, with scales



- in 2 Ebenen verstellbar
 - 360° drehbar, 60° schwenkbar
 - Nonius
 - Parallelität: 0,005 mm / 100 mm
 - Rechtwinkligkeit: 0,005 mm / 100 mm
- adjustable in 2 axes
 - 360° rotatable, 60° tiltable
 - vernier
 - parallelism: 0,005 mm / 100 mm
 - squareness: 0,005 mm / 100 mm

Typ / Type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	kg	Art.-Nr. / Order no.
SB2-80	180	73	33	165	73	34	0-85	139	130	14	● 14-TMV-SB2-80

