


# Dreibacken-Drehfutter

## Three-jaw lathe chucks

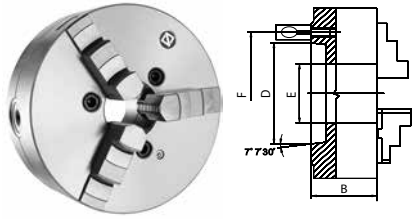


### Kurzkegelaufnahme DIN 55029 (Camlock), einteilige Backen

#### According to DIN 55029 (Camlock), one-piece jaws

#### Stahl / Steel

| Ø<br>mm | KK<br>Taper | B<br>mm | D<br>mm | E<br>mm | F<br>mm | RPM <sub>MAX</sub><br>min <sup>-1</sup> | kg  | Art.-Nr. /<br>Order no. |
|---------|-------------|---------|---------|---------|---------|---|-----|-------------------------|
| 125     | 3           | 59,5    | 54      | 35,5    | 70,6    | 4800                                    | 5   | ZE-8359-123             |
| 125     | 4           | 59,5    | 63,5    | 35,5    | 82,6    | 4800                                    | 5   | ZE-8359-124             |
| 160     | 3           | 68      | 54      | 42      | 70,6    | 4500                                    | 3   | ZE-8359-163             |
| 160     | 4           | 68      | 63,5    | 42      | 82,6    | 4500                                    | 9   | ZE-8359-164             |
| 160     | 5           | 68      | 82,6    | 42      | 104,8   | 4500                                    | 9   | ZE-8359-165             |
| 200     | 4           | 78      | 63,5    | 55      | 82,6    | 4000                                    | 19  | ZE-8359-204             |
| 200     | 5           | 78      | 82,6    | 55      | 104,8   | 4000                                    | 19  | ZE-8359-205             |
| 200     | 6           | 78      | 106,4   | 55      | 133,4   | 4000                                    | 19  | ZE-8359-206             |
| 250     | 6           | 89      | 106,4   | 76      | 133,4   | 3500                                    | 32  | ZE-8359-256             |
| 250     | 8           | 89      | 139,7   | 76      | 171,4   | 3500                                    | 32  | ZE-8359-258             |
| 315     | 6           | 96,2    | 106,4   | 103     | 133,4   | 2800                                    | 51  | ZE-8359-316             |
| 315     | 8           | 96,2    | 139,7   | 103     | 171,4   | 2800                                    | 51  | ZE-8359-318             |
| 315     | 11          | 140     | 196,9   | 103     | 235     | 2800                                    | 51  | ZE-8359-311             |
| 400     | 8           | 108     | 139,7   | 136     | 171,4   | 2000                                    | 101 | ZE-8359-408             |
| 400     | 11          | 108     | 196,9   | 136     | 235     | 2000                                    | 101 | ZE-8359-411             |
| 500     | 8           | 119     | 139,7   | 136     | 171,4   | 1200                                    | 150 | ZE-8359-508             |
| 500     | 11          | 119     | 196,9   | 190     | 235     | 1200                                    | 150 | ZE-8359-511             |
| 630     | 11          | 129     | 196,9   | 190     | 235     | 1000                                    | 274 | ZE-8359-611             |

Inkl. je 1 Satz Dreh- und Bohrbacken, Spanschlüssel, Befestigungsbolzen  
 Incl. 1 set each of solid jaws internally / externally stepped, wrench, fixing bolts

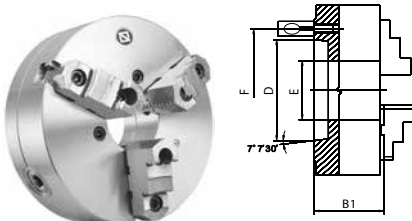

### Kurzkegelaufnahme DIN 55029 (Camlock), geteilte Backen

#### According to DIN 55029 (Camlock), two-piece jaws

#### Stahl / Steel

| Ø<br>mm | KK<br>Taper | B1<br>mm | D<br>mm | E<br>mm | F<br>mm | RPM <sub>MAX</sub><br>min <sup>-1</sup> | kg  | Art.-Nr. /<br>Order no. |
|---------|-------------|----------|---------|---------|---------|---|-----|-------------------------|
| 125     | 3           | 64,8     | 54      | 35,5    | 70,6    | 4800                                    | 5   | ZE-8369-123             |
| 125     | 4           | 64,8     | 63,5    | 35,5    | 82,6    | 4800                                    | 5   | ZE-8369-124             |
| 160     | 3           | 72,8     | 54      | 42      | 70,6    | 4500                                    | 9   | ZE-8369-163             |
| 160     | 4           | 72,8     | 63,5    | 42      | 82,6    | 4500                                    | 9   | ZE-8369-164             |
| 160     | 5           | 72,8     | 82,6    | 42      | 104,8   | 4500                                    | 9   | ZE-8369-165             |
| 200     | 4           | 82,8     | 63,5    | 55      | 82,6    | 4000                                    | 19  | ZE-8369-204             |
| 200     | 5           | 82,8     | 82,6    | 55      | 104,8   | 4000                                    | 19  | ZE-8369-205             |
| 200     | 6           | 82,8     | 106,4   | 55      | 133,4   | 4000                                    | 19  | ZE-8369-206             |
| 250     | 6           | 92,8     | 106,4   | 76      | 133,4   | 3500                                    | 32  | ZE-8369-256             |
| 250     | 8           | 92,8     | 139,7   | 76      | 171,4   | 3500                                    | 32  | ZE-8369-258             |
| 315     | 6           | 101,3    | 106,4   | 103     | 133,4   | 2800                                    | 51  | ZE-8369-316             |
| 315     | 8           | 101,3    | 139,7   | 103     | 171,4   | 2800                                    | 51  | ZE-8369-318             |
| 315     | 11          | 145      | 196,9   | 103     | 235     | 2800                                    | 51  | ZE-8369-311             |
| 400     | 8           | 116,8    | 139,7   | 136     | 171,4   | 2000                                    | 101 | ZE-8369-408             |
| 400     | 11          | 116,8    | 196,9   | 136     | 235     | 2000                                    | 101 | ZE-8369-411             |
| 500     | 8           | 129,8    | 139,7   | 136     | 171,4   | 1200                                    | 150 | ZE-8369-508             |
| 500     | 11          | 129,8    | 196,9   | 190     | 235     | 1200                                    | 150 | ZE-8369-511             |
| 630     | 11          | 140,3    | 196,9   | 190     | 235     | 1000                                    | 274 | ZE-8369-611             |

Inkl. je 1 Satz gehärteter Grund- und Umkehraufsatzbacken, Spanschlüssel, Befestigungsbolzen  
 Incl. 1 set each of hardened base jaws and reversible top jaws, wrench, fixing bolts